




MEARI


Outdoor PTZ
Smart Wi-Fi Camera

S2 Plus



Quick Start Guide

Description

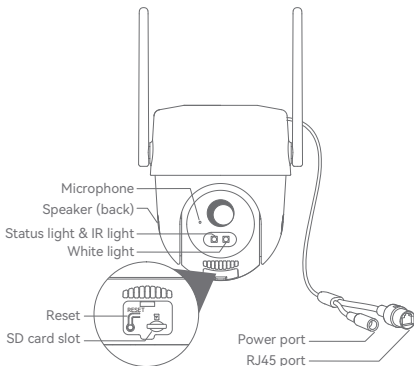

Name	Description
Power supply	DC 12V/1A
Status light	● Solid red: Network malfunction ● Blinking red slowly: Waiting for network connection ● Blinking red fast: Connecting the network ● ● Solid blue: Functioning properly
SD card slot	SD card storage (up to 256GB)
RESET	Press and hold for 5 seconds to reset the device (all settings will be restored to factory defaults)
RJ45 Port	Port for wired network. If the device is installed in a place without wireless network, such as basement, the device supports connecting to the network via network cable. Please make sure the length of the network cable can be connected to the router or repeater.

Tech Specs

Model: S2 Plus	
Resolution	2560(H) x 1440V)
Angle of view	90°/50°/110°
Pan/Tilt	Pan: 0°~355°, tilt: 0°~90°
Night visibility	Up to 30 m (98.4 ft)
Working temp	-20°C to 50°C
Local storage	SD card (up to 256GB)
Input power	DC 12V / 1A
Consumption	Up to 4.5W
Supported phone OS	iOS 9 / Android 5.0 or later
2.4GHz Wi-Fi	2412-2472MHz (Max. power<20dBm) (For CE) 2412-2462MHz (Max. power<30dBm) (For FCC)
5GHz Wi-Fi SRD	5150-5725MHz (Max. power<23dBm) (For CE) 5725-5850MHz (Max. power<14dBm)
5GHz Wi-Fi	5150-5850MHz (Max. power<23dBm) (For FCC)
Network Interface	RJ45