Magnetic Locks

Особенности

- Отсутствие остаточного магнетизма
- Защита от перенапряжений с помощью MOV
- Корпус из анодированного алюминия (US 28)
- Монтажная пластина с прорезью под ключ для удобства установки
- Съемная лицевая панель для легкого доступа к проводам

Технические характеристики

Питание	**12В DC–24В DC**
Выходной сигнал	Сигнал замка (NO/NC/COM NO/COM)
Материал	Корпус из анодированного алюминия (US 28)
Подходит для дверей	Деревянные, стеклянные, металлические, противопожарные
Логотип	Возможность нанесения
Сертификат	CE–EMC RDHS
Рабочая температура	-20°C +55°C (-4F–13IF)
Рабочая влажность	0–95%

Series

180kg Size:168x38mm

280kg Size:250x47mm

320kg Size:240x56.5mm

500kg Size:265x73mm

Схема подключения

Порядок действий

1. Снимите крышку
2. Установите перемычку на 12В или 24В
3. Подключите +12В/24В к клемме 1
4. Подключите 0В к клемме 2
5. Установите крышку обратно

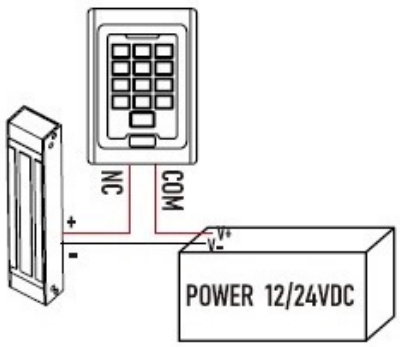

Спецификация моделей

Model	Holding Force	Lock Signal	Time delay	Current	LED	Door
EML180-2	180kg(350Lbs)	NO/COM		12V/400mA+10%		
EML280-2	280kg(600Lbs)	NO/COM				
EML280-5	280kg(600Lbs)	NO/NC/COM				
EML280-5T	280kg(600Lbs)	NO/NC/COM	YES			
EML320-2	320kg(700Lbs)	NO/COM		12V/400mA+10%	Red (locked),	Single
EML320-5	320kg(700Lbs)	NO/NC/COM		24V/200mA+10%	Green(unlocked)	door
EML320-5T	320kg(700Lbs)	NO/NC/COM	YES			
EML500-2	500kg(1100Lbs)	NO/COM				
EML500-5	500kg(1100Lbs)	NO/NC/COM				
EML500-5T	500kg(1100Lbs)	NO/NC/COM	YES			

180kg series

Size

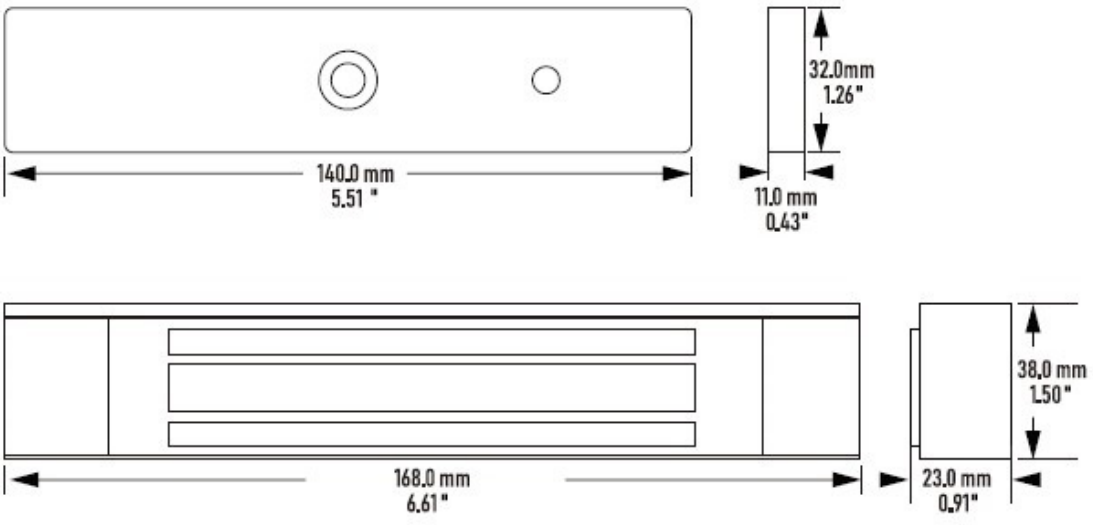

Models

Model: EML180-2

CE RoHS

280kg series

Size

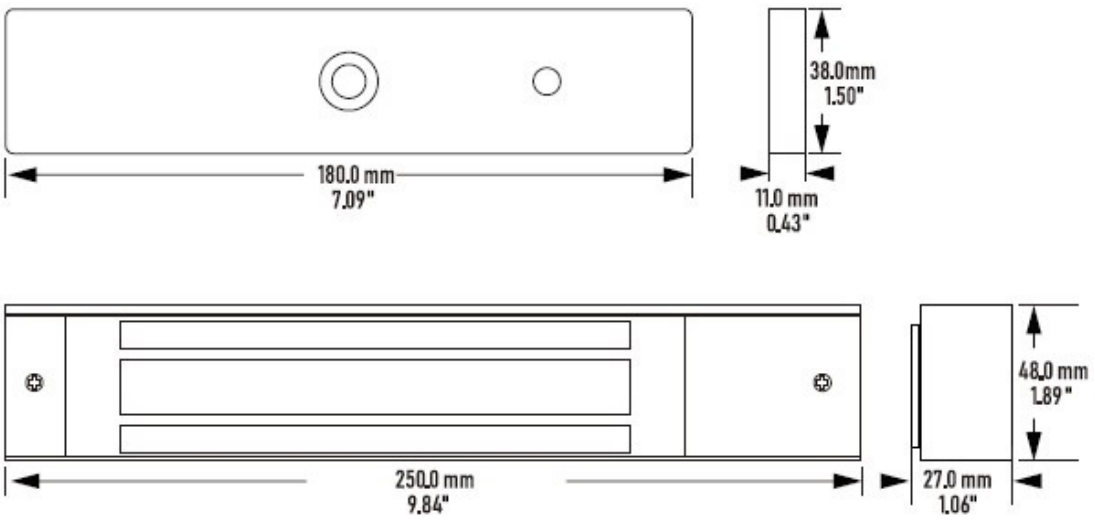

Models

Model: EML280-2, EML280-5, EML280-5T

320kg series

Size

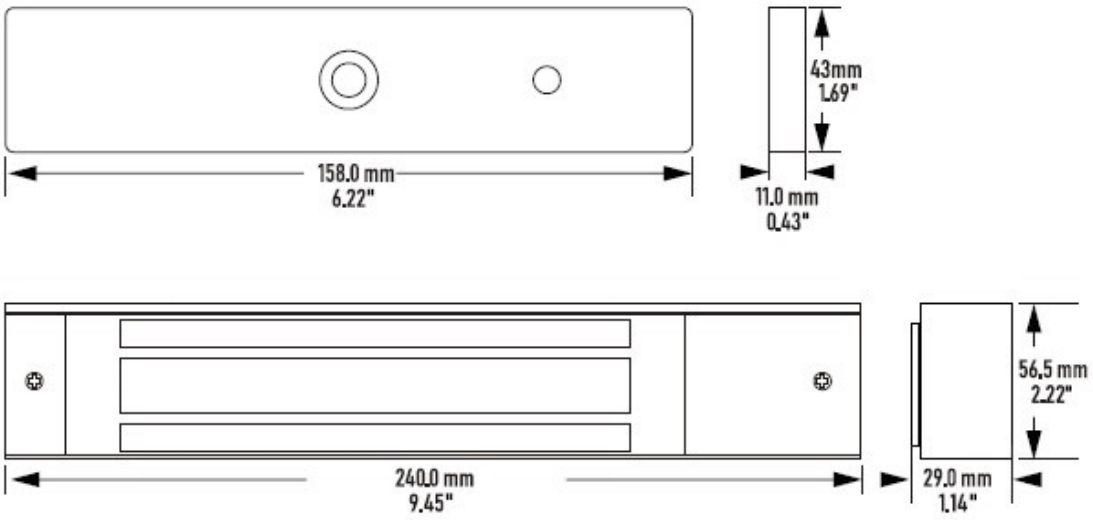

Models

Model: EML320-2. EML320-5. EML320-5T

500kg series

Size

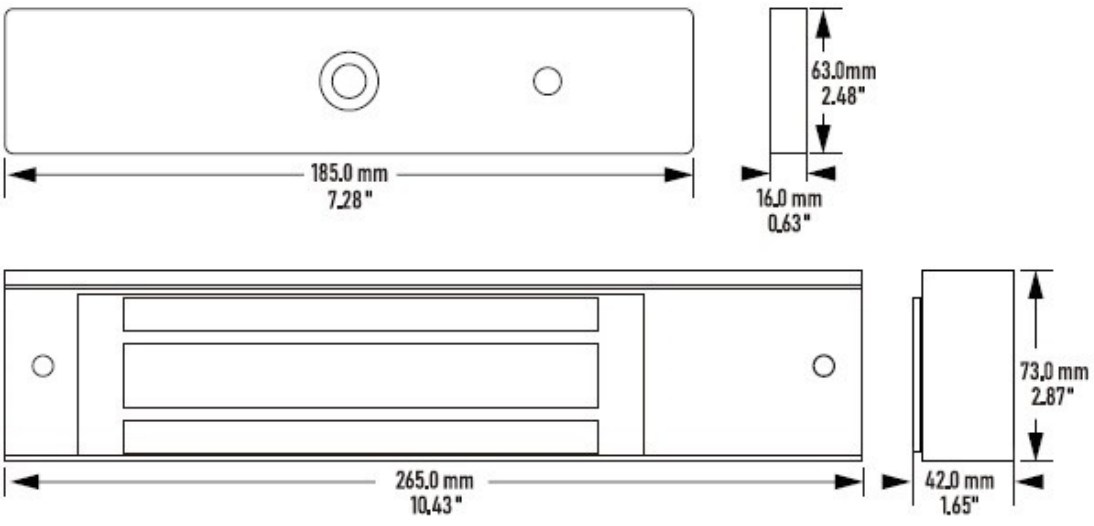

Models

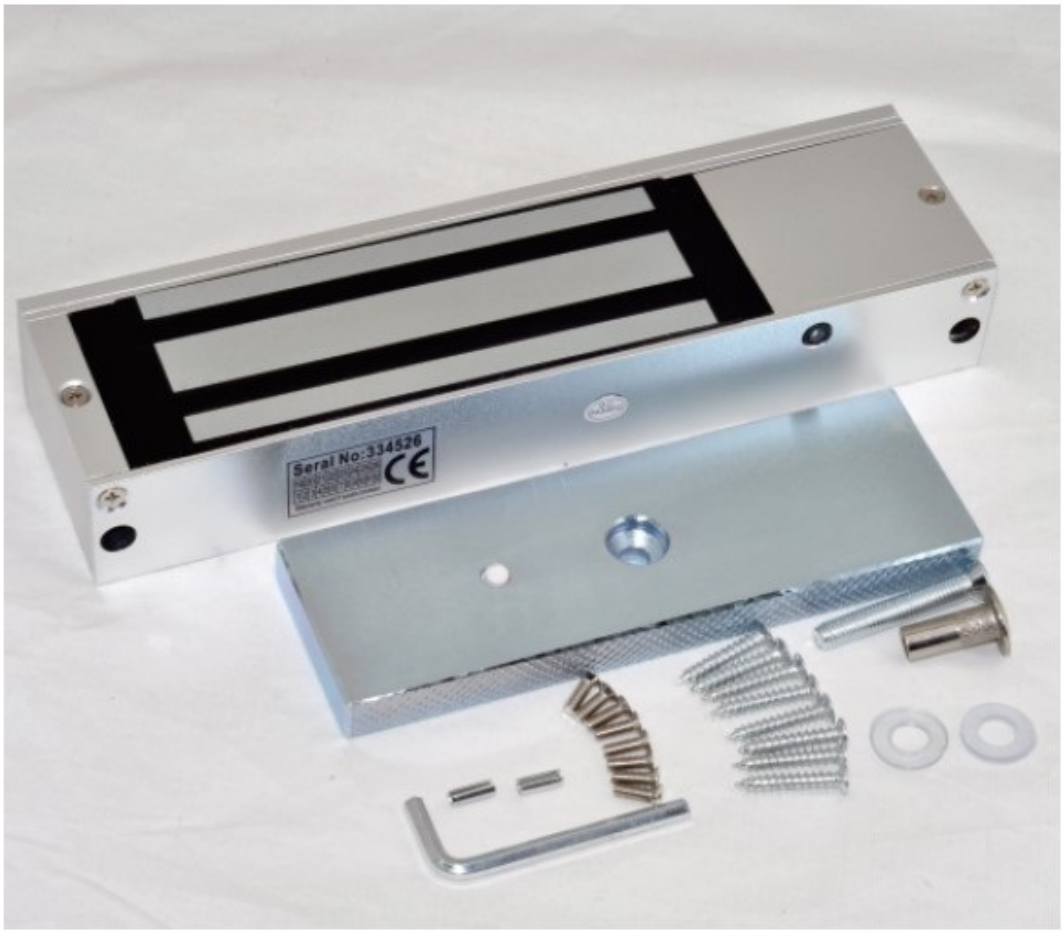

Model:EML500-2. EML500-5. EML500-5T

Installation guide

Installation Above Door

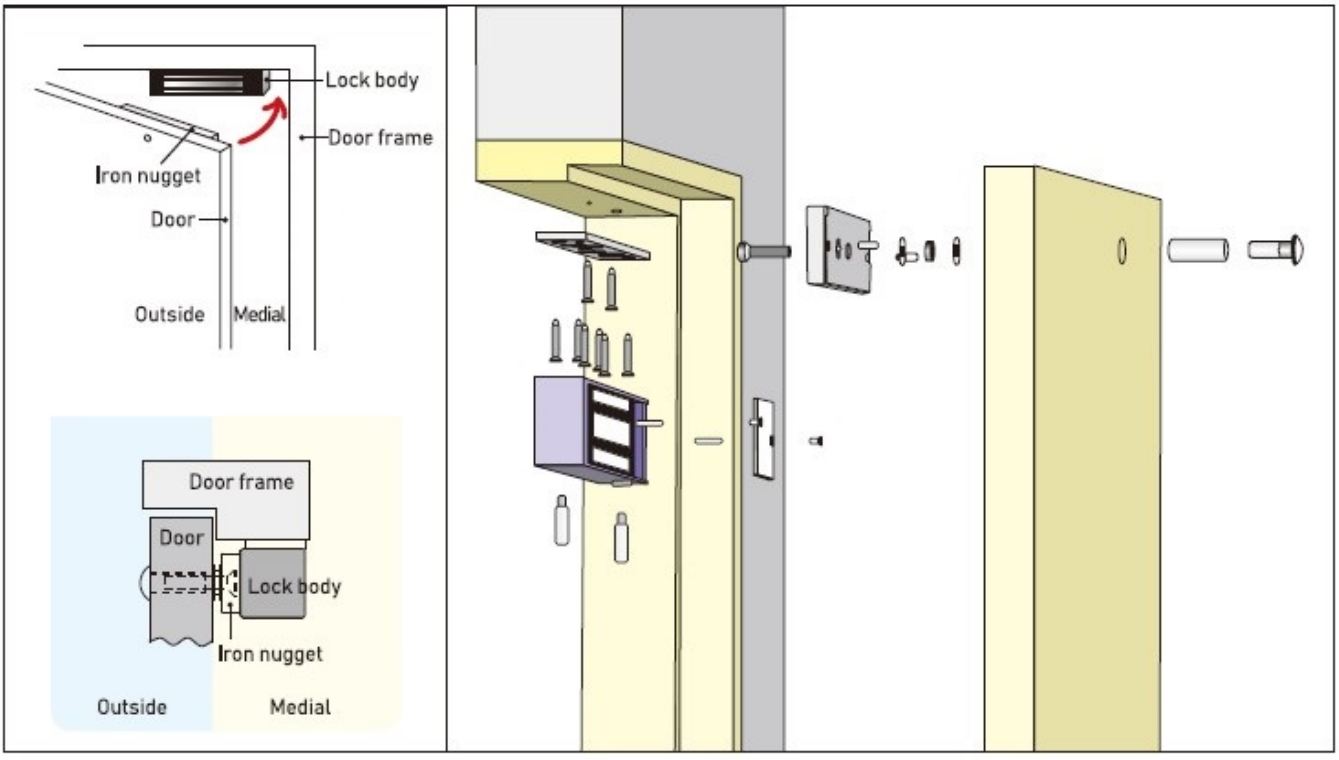

Installation Inside Frame

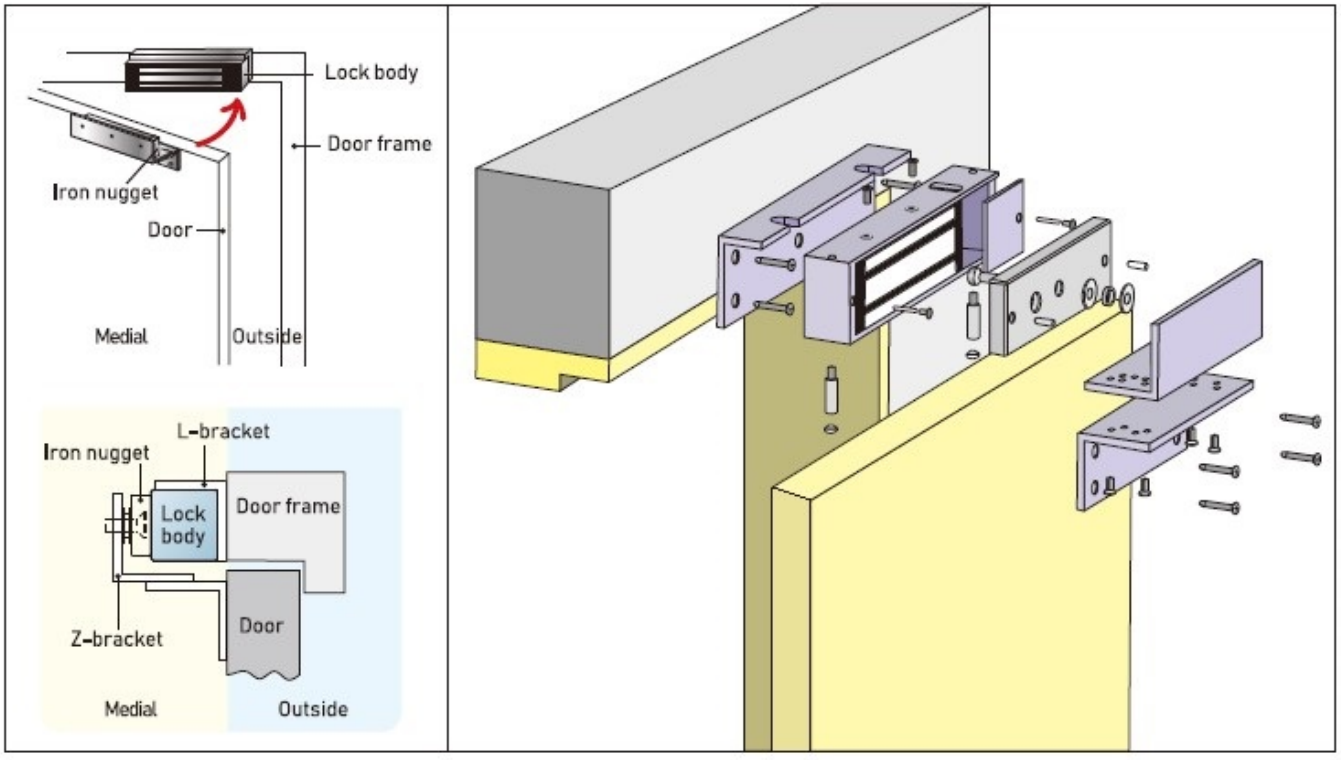

Installation guide

Installation for Sliding Door

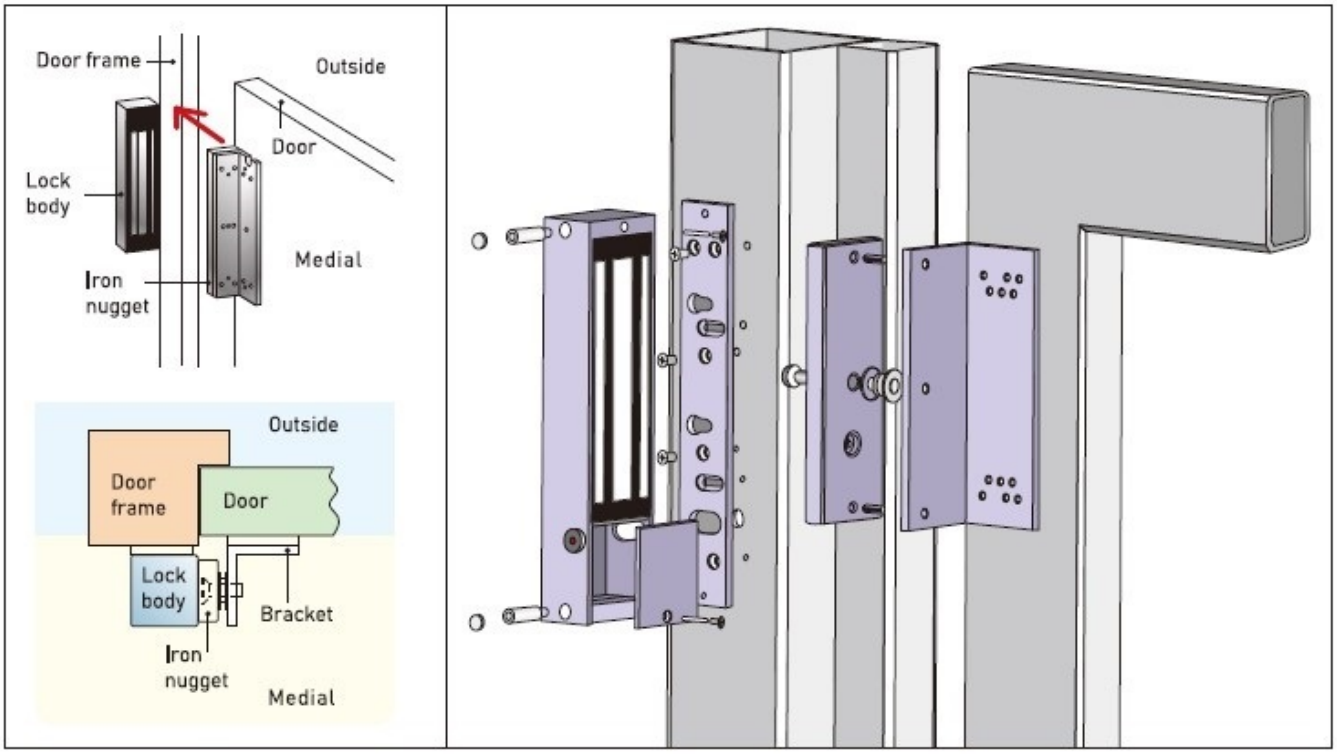
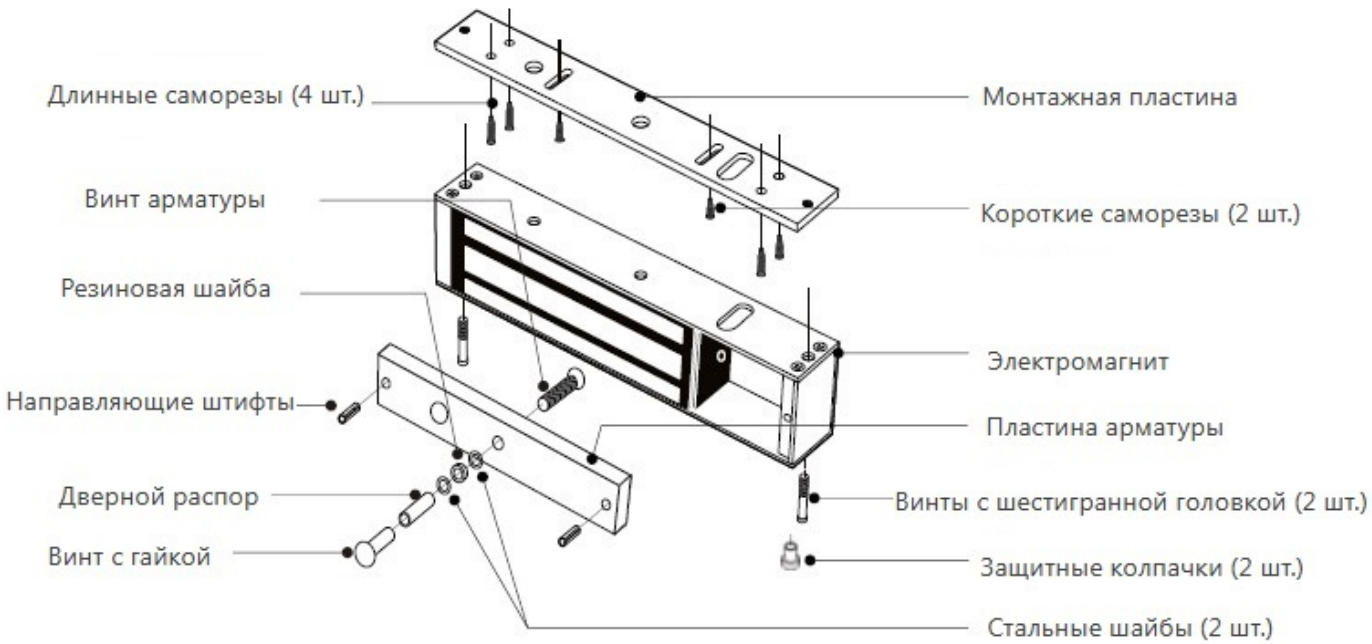
Overview